

## iQ700, Built-in fully automatic coffee machine, Black CT718L1B0



- ✓ TFT-Touchdisplay Pro – Large colour touch display for comfortable operation.
- ✓ Explore the huge variety of international coffee specialities with one swipe - Siemens coffeeWorld.
- ✓ Three different aroma profiles to choose from, according to your personal taste - aromaSelect.
- ✓ Fully automatic steam cleaning and optimal hygiene thanks to autoMilk Clean.
- ✓ Home Connect: Access and control your coffee maker, no matter where you are - with the easy-to-use Home Connect App

### Features

#### Technical Data

Construction type : Built-in  
 Frothing nozzle : No  
 Display : No  
 Water protection system : No  
 Portion sizes : All cups  
 Dimensions : 455 x 594 x 385 mm  
 Dimensions of the packed product (HxWxD) : 540 x 478 x 670 mm  
 Min. required niche size for installation (HxWxD) : 449 x 558 x 376 mm  
 EAN code : 4242003895580  
 Fuse protection : 10 A  
 Voltage : 220-240 V  
 Frequency : 50/60 Hz  
 Plug type : Gardy plug w/ earthing



### Included accessories

1 x assembly screws, 1 x milk container, 1 x test strip, 1 x connection hose for milk frother, 1 x milk pipe, 1 x welcome-Box

### Optional accessories

TZ80004B	Care Set for EQ Coffee Machines
TZ80002B	3 x Descaling Tablets for EQ Coffee Mach
TZ80001B	10 x Cleaning Tablets for EQ Coffee Mach

## iQ700, Built-in fully automatic coffee machine, Black CT718L1B0

### Features

#### Flavour

- up to 29 different coffee specialties (within appliance and Home Connect app)
- warm milk, milk froth and hot water function
- aromaSelect – 3 different aroma profiles (mild-balanced-distinctive)
- adjustable milk ratio for classic milk-mix beverages
- intelligent strength adjustment – adaptive coffee management based on strength and size
- aromaDouble Shot – less bitterness in large beverages due to two brewing processes

#### Convenience

- TFT-Touchdisplay Pro - 6.8" TFT- color display with touch and slide functionality
- Favorites: save up to 30 personalised beverages
- height adjustable beverage outlet (up to 15 cm (max) high glasses )
- oneTouch DoubleCup – get two cups at the touch of a button
- 2.4 l removable water tank

#### Performance

- ceramDrive – high-quality grinder made of wear-resistant ceramic
- water pump with 19 bar pressure

#### Hygiene

- autoMilk Clean – automatic steam cleaning after every drink
- calc'nClean – combined descaling and cleaning program for less effort
- removable brewing unit – for easy and hygienic cleaning
- dishwasher-proof: beverage outlet, drip tray and drip pans
- automatic reminder for cleaning, descaling or water filter change

#### Home Connect

- remote control – operate your appliance from everywhere
- coffeePlaylist – select several drinks in the app, prepared in your chosen order
- additional coffee know-how
- software update – always the newest software status
- online support
- Security: Security is of top priority at Home Connect. The Home Connect app has been tested and certified by TÜV IT. And the encrypted data transfer via Home Connect protocol protects against unauthorised access.
- integrated 0,7 l milk container
- 500 g bean container with aroma protection lid
- illuminated coffee outlet and stage
- adjustable grinding degree (multi-level)
- child lock


#### Accessories

- included accessories: 1 x test strip
- Separately available accessories: cleaning tablets (TZ80001...), descaling tablets (TZ80002...), BRITA Intenza water filter (TZ70003/TZ70033), care set for fully-automatic espresso makers (TZ80004...), adapter for milk carton (TZ70001), milk container (TZ90009)

iQ700, Built-in fully automatic coffee machine, Black  
CT718L1B0


Dimensioned drawings

Measurements in mm

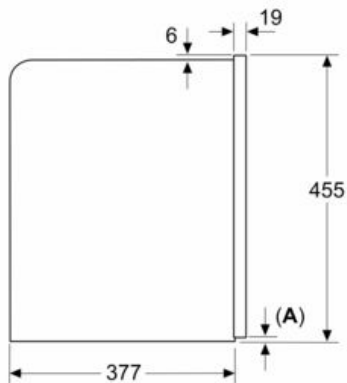


A: 7.5 mm

Measurements in mm  
Left corner installation

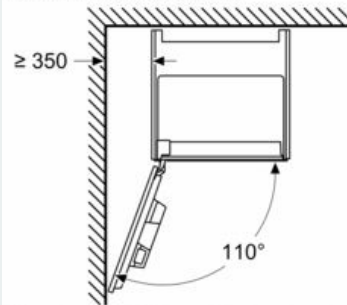


If using the 92° hinge limiter, the min. distance to the wall is only 100 mm

Measurements in mm

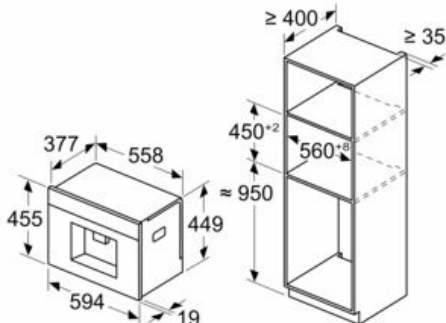


Bean and water containers are removed from the front  
Recommended installation height  
950–1450 mm

Measurements in mm

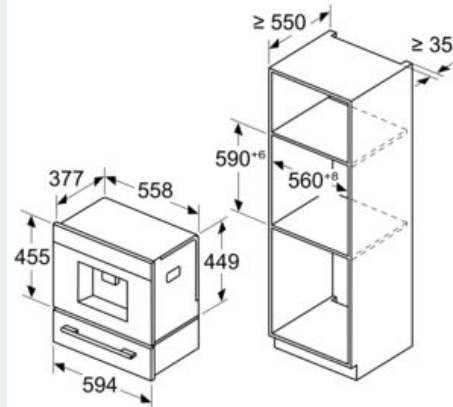

Measurements in mm

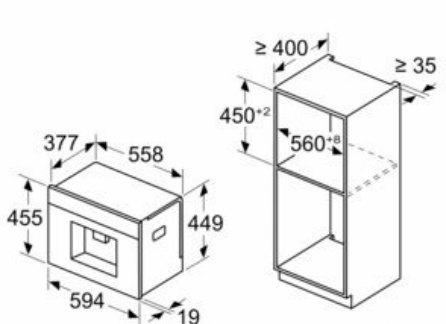

Bean and water containers are removed from the front  
Recommended installation height  
950–1450 mm